

Catalog No.	Type:
Job Name:	

28700 Series

Staggered Strip T8 or T5



General Characteristics:

Lamp Type: 1 or 2 lamps T5 or T8
 Ballast Type: Electronic Ballast
 Standard Voltage: Universal 120-277
 Options: Dimming Ballast, Emergency Ballast, 6' SJT Grounded Cord & Plug, With Lamps, Ends
 Mounting: Surface Mount
 Additional Info: UL Listed & Title 24 Compliant


Catalog Ordering: Example: 28724-117-UNV-WL

--	--	--	--	--	--

Features & Specifications:

The 28700 Series is a functional multi-purpose staggered strip that incorporates premium performance and construction durability. This series can be installed using various mounting methods and numerous options and accessories are available. The 28700 Series can be the illumination solution in commercial, industrial and residential applications. Ideal for warehouses, garages, utility rooms, and production lines.

- T5 or T8 strip available in a large variety of lengths and lamp configurations
- Mounted individually or in continuous rows
- Housing is pre-painted stamped steel
- Numerous knockouts for ease of installation
- White polyester polymer with a minimum of 82% reflectivity
- Suitable for damp location
- Mini body to fit confined spaces

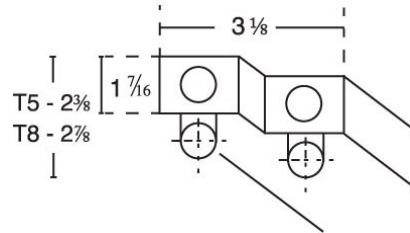

FAMILY TYPE	LAMPING	LENGTH	BALLAST/ VOLTAGE	OPTIONS
287	24-117 (1- F17T8)	24"	UNV (120-277 Volt) DIM (Dimming Ballast)	EMR (450 Lumen Emergency Ballast) EMR 1400 (1400 Lumen Emergency Ballast) WL (With Lamps) PLG (6' SJT Cord & Plug) END (For single fixture mounting)
	24-217 (2- F17T8)	28"		
	36-125 (1- F25T8)	36"		
	36-225 (2- F25T8)	40"		
	48-132 (1- F32T8)	48"		
	48-232 (2- F32T8)	52"		
	60-140* (1- F40T8)	60"		
	60-240 * (2- F40T8)	64"		
	22-114 (1- F14T5)	24 1/2"		
	22-214 (2- F14T5)	24 1/2"		
	22-124 (1- F24T5HO)	24 1/2"		
	22-224 (2- F24T5HO)	24 1/2"		
	34-121 (1- F21T5)	38 1/4"		
	34-221 (2- F21T5)	38 1/4"		
	34-139 (1- F39T5HO)	38 1/4"		
	34-239 (2- F39T5HO)	38 1/4"		
	46-128 (1- F28T5)	50"		
	46-228 (2- F28T5)	50"		
	46-154 (1- F54T5HO)	50"		
	46-254 (2- F54T5HO)	50"		
	58-135* (1- F35T5)	62"		
	58-235* (2- F35T5)	62"		
	80-180* (1- F80T5HO)	62"		
	80-280* (2- F80T5HO)	62"		

* Not available with Dimming Ballast

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

