

L6000 LED-PCB Radial Wrap Series



APPLICATIONS

- Parking Garages
- Laundry Rooms
- Covered Parking
- Stairwells
- Corridors
- Canopies

FEATURES

- Projected L70: 134,000 hours*
- Daylight harvesting, bi-level/ step dimming, occupancy sensors, emergency battery back-up options available
- Energy efficient – up to 90% savings over current energy/lighting costs
- Low maintenance
- Compliance: ETL & DLC Premium

* Based on IES TM21 projection

SPECIFICATIONS

- Housing made from die formed heavy gauge pre-painted cold rolled steel and is finished with a post-production white polyester polymer
- Available with an extended body (Shown to the left) to house a sensor within the box or externally
- Tool-less sensor mounting plate allows for easy access when making sensor adjustments or when performing fixture maintenance
- Acrylic Lens

TECHNICAL INFORMATION

- Light Source: LED Board
- Power Source: LED High Efficiency Power Supply
- Voltage: Universal 120 to 277
- CCT: 30K, 35K, 40K & 50K
- CRI: 80+
- Mounting: Surface, Top Box
- Power Factor: >.95
- Driver capable of 0-10V dimming
- Highest AMBIENT temperature rating in the category (50°C / 122°F)




L6000 LED-PCB Radial Wrap Series

CATALOG ORDERING EXAMPLE:

L60-48-ML-40K-OS

FAMILY TYPE	LENGTH IN INCHES/ WATTAGE	COLOR TEMPERATURE	OPTIONS
L60	24 -LL (24" housing - Low Lumen- 16.47 Watts/ 2,023 lms)*	30K (3000 Kelvin Temp)	OS (Occupancy Sensor)
	24 -HL (24" housing - High Lumen- 27.22 Watts/ 2,859 lms)*	35K (3500 Kelvin Temp)	OSD (Occupancy Sensor w/ Daylight)
	24 -XL (24" housing - Extra Low Lumen- Programmable Wattage)**	40K (4000 Kelvin Temp)	PRGOS-LS (Sensorswitch LSXR-ADC-3v Occ Sensor w/ Dimming Photocell/ External Mount)
	24 -ML (24" housing - Medium Lumen- Programmable Wattage)**	50K (5000 Kelvin Temp)	PRGOS-LO (IRTEC LOD509 Bi-Level Occ Sensor w/ Photocell/ External and Integral Mount)
	48 -LL (48" housing - Low Lumen- 31.65 Watts/ 4,103 lms)*		PRGOS-LR (IRTEC LRD509 Programmable Occ Sensor w/ Remote Control/ External and Integral Mount)
	48 -HL (48" housing - High Lumen- 52.76 Watts/ 5,864 lms)*		PRGOS-FS Wattstopper FSP211 Programmable Occ Sensor w/ Remote Control/ Integral and J-Box Mounted)
	48 -XL (48" housing - Extra Low Lumen- Programmable Wattage)**		EMR (LED Emergency Lighting)
	48 -ML (48" housing - Medium Lumen- Programmable Wattage)**		C6 (6' Cord)
			PLG (6' SJT Cord & Plug)
			EB (Extended Body- 6" Extension)

Specifications and Dimensions subject to change without notice. Contact factory for updates. (909) 948-8878 *DLC Qualified Product Listed **Call Factory for Options

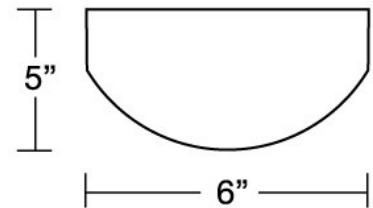

SAFETY WARNING

FOR YOUR SAFETY, READ AND FOLLOW ALL INSTRUCTIONS TO PREVENT ELECTRIC SHOCK OR FIRE

- **INSTALLATION REQUIRES KNOWLEDGE OF LIGHTING LUMINAIRE ELECTRICAL SYSTEMS**
Contact qualified electrician prior to installation
- **DISCONNECT POWER BEFORE INSTALLATION**
- **DO NOT ALTER PRE-EXISTING HOLES OR DRILL NEW HOLES**
- **CHECK FOR INCLOSED WIRING COMPONENTS PRIOR TO DRILLING**
Luminaire wiring, ballasts, power supplies or other electrical parts may be damaged.
- **USE ONLY ON COMPATIBLE LUMINAIRES**
Installation requires specific dimensions and construction features.
- **PROTECT WIRING FROM ABRASION**
Do not expose wiring to sharp objects or edges of sheet metal.

INSTALLATION INSTRUCTIONS

1. Disconnect Power to the circuit supplying power to the fixture
2. Removed the existing lamps and fixture
3. Disassemble new fixture to allow access to the LED Driver
4. Run existing power supply wires into fixture through fixture knock-out or end plug on fixture
5. Mount the fixture to surface, or hang fixture with appropriate fixture mounting hardware or install fixture in T-bar Ceiling (*Be sure to follow local building codes for the appropriate fixture installation methods.*)
6. Connect power supply wires to supplied wire disconnect to provide power to fixture
7. Re-assemble fixture
8. Re-connect power and check installation



Revised 9/6/16