

Catalog No.	Type:
Job Name:	

6200 Series

Indirect Basket



General Characteristics:


Lamp Type: 1 or 2 lamp T5 or T8
 Ballast Type: Electronic Ballast
 Standard Voltage: Universal 120-277
 Options: Dimming Ballast, Emergency Ballast, Dual Cable Kit, With Lamps
 Mounting: Pendant (*Mounting Hardware is Sold Separately*)
 Additional Info.: UL Listed & Title 24 Compliant

Features & Specifications:

Sophisticated styling in an indirect luminaire. The 6200 series offers a wide, even indirect illumination, providing extraordinary visual comfort in the contemporary open office environment, with styling to enhance a lobby or highlight a public area. Perforated reflector panels with soft white in-lay provide a distinctive, contemporary look and allow an identifiable source of light for visual comfort.

- Housing made from die formed heavy gauge pre-painted cold rolled steel
- Baffle is made of cold rolled steel with 5/64" diameter micro-perforations at staggered 7/64" intervals
- Hinged baffle for quick easy lamp access
- Diffuser is made of .020 white opal acrylic
- End Caps are molded white plastic
- Finished in a white polyester polymer with a minimum of 82% reflectivity
- Available in a variety of lamp configurations
- Suitable for damp location
- Optional Joiner assembly for continuous runs and tandem configurations
- Dual Cable Kit option available (*Mounting Hardware is Sold Separately*)

Catalog Ordering: Example: 6248-132-UNV

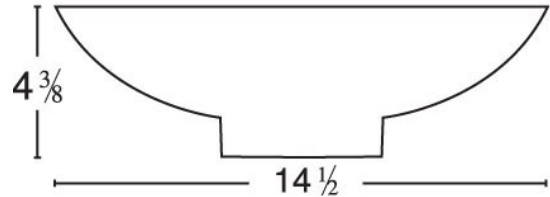

62			
-----------	--	--	--

FAMILY	LENGTH IN INCHES/	BALLAST/VOLTAGE	OPTIONS
62	48-132 (1- F32T8)	UNV (120-277 Volt)	EMR (450 Lumen Emergency Ballast)
	48-232 (2- F32T8)	DIM (Dimming Ballast)	EMR 1400 (1400 Lumen Emergency Ballast)
	48-128 (1- F28T5)		DC (Dual Cable Kit)
	48-228 (2- F28T5)		WL (With Lamps)
	48-154 (1- F54T5HO)		
	48-254 (2- F54T5HO)		

Specifications and Dimensions Subject to change without notice
 FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510

