

<b>Project</b>	
<b>Type</b>	
<b>Notes</b>	
<b>Catalog No.</b>	
<b>Date</b>	

## L6000 Series LED Radial Wrap (L-Bar)

The L6000 LED radial is a modern fixture in a bright white finish. Ideal for lighting stairwells and multi-deck parking. The 6000 drives excellent paybacks while providing an aesthetic upgrade.



### Specifications

#### Applications

- Parking Garages
- Laundry Facilities
- Stairwells
- Corridors
- Night Lighting
- Corridors
- Canopies

#### Construction

- Housing made from die formed heavy gauge pre-painted cold rolled steel and is finished with a post- production white polyester polymer
- Available with an extended body to house a sensor within the box or externally
- Tool-less sensor mounting plate allows for easy access when making sensor adjustments or when performing fixture maintenance
- Acrylic lens

#### Mounting

- Surface Mount. Cord and plug options offered.

#### Options

- Sensors can be integrated for additional energy savings
- Emergency battery back-up
- Extended body

#### Warranty

- Five-year warranty.\* Terms and Conditions Apply.  
See warranty documentation for more information.

#### Certification

- ETL Compliant
- Adheres to LM79, LM80 and TM21 industry standards
- DesignLights Consortium® (DLC) qualified
- Lighting Facts
- RoHS Compliant



## Catalog Ordering Example

**L6048-4254-H1**

<b>L60</b>				
------------	--	--	--	--

Family Type	Length in Inches/Wattage	Color Temp	Transmission/ # of Bars	Options
L60	24 - 212 (2 Foot, 12 Watts/1 -2FT Bar)	3 (3000 Kelvin Temp)	S1 (Standard 80%/ One Bar)	OS (Occupancy Sensor)
	24 - 225 (2 Foot, 25 Watts/1 -2FT Bar)	35 (3500 Kelvin Temp)	S2 (Standard 80%/ Two Bars)	OSD (Occupancy Sensor w/ Daylight)
	48 - 212 (4 Foot, 12 Watts/1 -2FT Bar)	4 (4000 Kelvin Temp)	H1 (High 94%/ One Bar)	PRGOS-LS (Sensorswitch LSXR-ADC-3v Occ Sensor w/ Dimming Photocell/ External Mount)
	48 - 225 (4 Foot, 25 Watts/1 -2FT Bar)	5 (5000 Kelvin Temp)	H2 (High 94%/ Two Bars)	PRGOS-LO (IRTEC LOD509 Bi-Level Occ Sensor w/ Photocell)
	48 - 425 (4 Foot, 25 Watts/1 -4FT Bar)			PRGOS-LR (IRTEC LRD509 Programmable Occ Sensor w/ Remote Control)
	48 - 450 (4 Foot, 50 Watts/1 -4FT Bar)			PRGOS-FS Wattstopper FSP211 Programmable Occ Sensor w/ Remote Control/ Integral and J-Box)
	96 - 225 (8 Foot, 25 Watts/1 -2FT Bar)			EMR (Emergency Battery)
	96 - 425 (8 Foot, 25 Watts/1 -4FT Bar)			PLG (6' SJT Cord & Plug)
	96 - 450 (8 Foot, 50 Watts/1 -4FT Bar)			EB (Extended Body)

Specifications and Dimensions subject to change without notice. Contact factory for updates: (909) 948-8878

### Safety Warning

**FOR YOUR SAFETY, READ AND FOLLOW ALL INSTRUCTIONS TO PREVENT ELECTRIC SHOCK OR FIRE**

- **INSTALLATION REQUIRES KNOWLEDGE OF LIGHTING LUMINAIRE ELECTRICAL SYSTEMS**  
Contact qualified electrician prior to installation.
- **DISCONNECT POWER BEFORE INSTALLATION**
- **DO NOT ALTER PRE-EXISTING HOLES OR DRILL NEW HOLES**
- **CHECK FOR INCLOSED WIRING COMPONENTS PRIOR TO DRILLING**  
Luminaire wiring, ballasts, power supplies or other electrical parts may be damaged.
- **USE ONLY ON COMPATIBLE LUMINAIRES**  
Installation requires specific dimensions and construction features.
- **PROTECT WIRING FROM ABRASION**  
Do not expose wiring to sharp objects or edges of sheet metal.

### Installation Instructions

1. Disconnect Power to the circuit supplying power to the fixture
2. Removed the existing lamps and fixture
3. Disassemble new fixture to allow access to the LED Driver
4. Run existing power supply wires into fixture through fixture knock-out or end plug on fixture
5. Mount the fixture to surface, or hang fixture with appropriate fixture mounting hardware or install fixture in T-bar Ceiling (Be sure to follow local building codes for the appropriate fixture installation methods.)
6. Connect power supply wires to supplied wire disconnect to provide power to fixture
7. Re-assemble fixture
8. Re-connect power and check installation

## Technical Information

Available CCT	30K, 35K, 40K & 50K
CRI	84
Delivered Lumens	See Performance Data
Dimming	0-10V Dimming Standard
Efficacy	106+ LPW
Input Frequency	50/60 Hz
L70	398,000
Light Source	LED Light Bar
Power Factor	> 0.95
Power Source	LED High Efficiency Power Supply
Rated Wattage	See Performance Data
Temperature Rating	-40°C – 40°C Ambient
THD	< 20%
Voltage	120V to 277V

## Application Photo



## Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Tested Wattage (W)	5000K	
					Delivered Lumens (lm)	Efficacy (lm/W)
Clear Lens	2'	L6024-2125-H1	12	14.8	1,598	108
		L6024-2255-H1	25	27.8	2,947	106
	4'	L6048-2125-H1	12	14.8	1,598	108
		L6048-2255-H1	25	27.8	2,947	106
		L6048-4255-H1	25	28.0	3,093	110
		L6048-4505-H1	50	53.5	5,858	110
	8'	L6096-2255-H2	50	55.5	5,894	106
		L6096-4255-H2	50	56	6,185	110
		L6096-4505-H2	100	106.5	11,716	110


## Photometric Data

**L6048-4505-H1** Tested in accordance to IESNA LM-79

### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-10	192.34	3.51%
10-20	549.63	10.03%
20-30	817.22	14.91%
30-40	949.33	17.33%
40-50	932.51	17.02%
50-60	793.67	14.48%
60-70	575.91	10.51%
70-80	348.12	6.35%
80-90	189.96	3.47%
90-100	90.82	1.66%
100-110	30.95	0.56%
110-120	7.91	0.14%
120-130	0.91	0.02%

### Polar Graph

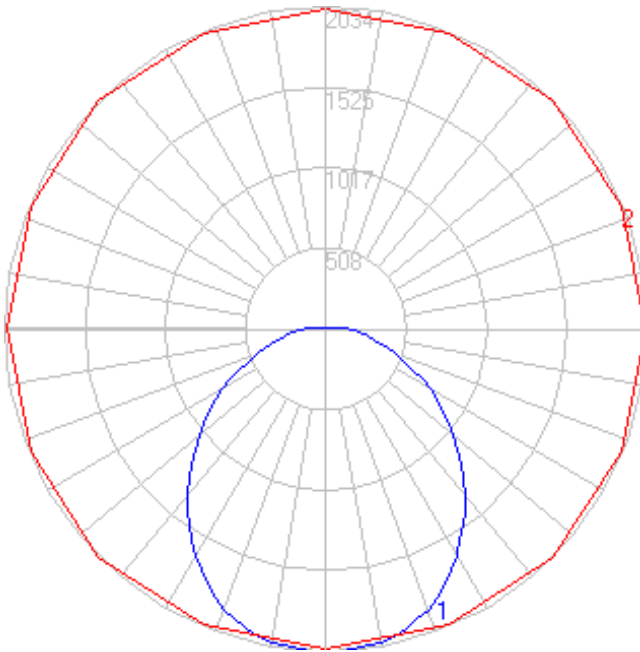

## Physical Characteristics

### Dimensions

Version	H	L	W
2FT	5.0"	24.0"	6.0"
2FT w/ Extended Body	5.0"	30.0"	6.0"
4FT	5.0"	48.0"	6.0"
4FT w/ Extended Body	5.0"	54.0"	6.0"
8FT	5.0"	96.0"	6.0"
8FT w/ Extended Body	5.0"	102.0"	6.0"

### Extendend Body Version



### Weights

Version	Weight
2FT	5lbs
2FT w/ Extended Body	6lbs
4FT	11lbs
4FT w/ Extended Body	12lbs
8FT	20lbs
8FT w/ Extended Body	21lbs