

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

L5600 SERIES LED Lensed Wraparound

The L5600 Series is a functional multi-purpose square lensed wraparound that incorporates premium performance and construction durability.



Features & Specifications

Applications

Ideal for use in warehouses, distribution centers, garages, utility rooms, corridors, schools, offices, hospitals and canopies.

Construction

Housing made from die formed heavy gauge pre-painted cold rolled steel and is finished with a post- production white polyester polymer frosted diffuser.

Mounting

Surface mount. Chain and cable mount ready. Cord and plug options offered.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 480V option. 50/60HZ input frequency.

Operating Temperature

Suitable for -20°C – 50°C Ambient

Lumen Maintenance

L70 rating of 122,000 hours

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Compliant. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) qualified¹. RoHS Compliant.

Performance Data

Form Factor	Rated Wattage	Tested Wattage	Delivered Lumens	Efficacy	CRI
2FT-7IN	25W	25W	2,860 LM	130 LPW	>80
2FT-9IN	25W	25W	3,250 LM	130 LPW	>80
4FT-7IN	22W	22W	2,860 LM	130 LPW	>80
4FT-9IN	22W	22W	2,860 LM	130 LPW	>80
4FT-7IN	34W	34W	4,420 LM	130 LPW	>80
4FT-9IN	34W	34W	4,420 LM	130 LPW	>80
4FT-7IN	40W	40W	5,200 LM	130 LPW	>80
4FT-9IN	40W	40W	5,200 LM	130 LPW	>80



L56									
1	2	3	4	5	5	5	5	5	5

1 - Series 2 - Length in Inches/Wattage/ Width 3 - Color Temp (CCT)

L56	24 - 25W-7 (2 Foot, 25 Watt/ 7" Width) 24 - 25W-9 (2 Foot, 25 Watt/ 9" Width) 48 - 22W-7 (4 Foot, 22 Watt/ 7" Width) 48 - 22W-9 (4 Foot, 22 Watt/ 9" Width) 48 - 34W-7 (4 Foot, 34 Watt/ 7" Width) 48 - 34W-9 (4 Foot, 34 Watt/ 9" Width) 48 - 40W-7 (4 Foot, 40 Watt/ 7" Width) 48 - 40W-9 (4 Foot, 40 Watt/ 9" Width)	35K (3500 Kelvin Temp) 40K (4000 Kelvin Temp) 50K (5000 Kelvin Temp)
------------	--	---

4- Controls

- OS** (Occupancy Sensor)
- PRGOS-LS** ([Sensorswitch LSXR-ADC-3v Occ Sensor w/ Dimming Photocell](#))
- PRGOS-LR** ([IRTEC LRD509 Programmable Occ Sensor w/ Remote Control](#))

5 - Options

- EM5W** (Battery Backup, 5 Watts, ~650 lumens)²
- EM10W** (Battery Backup, 10 Watts, ~1300 lumens)²
- EM5WT20** (Title 20 Compliant Battery Backup, 5 Watts, ~650 lumens)²
- EM10WT20** (Title 20 Compliant Battery Backup, 10 Watts, ~1300 lumens)²
- 480SD** (480 Step-Down)
- PLG** (6' SJT Cord & Plug)
- 10GL** ([10' Loop w/ Gripple Hanging Kit](#))³
- L7/15P** (277V, 15a Twist Lock Plug)
- L7/20P** (277V, 20a Twist Lock Plug)
- BAA** (Buy American Act Compliant)

Notes

1 Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/ to confirm which versions are qualified.
 2 Lumens will change based on fixture selection. Consult with factory for additional options.
 3 Hanging kit manufactured by Gripple Inc.


Photometric Data

L5648-40W-50K Tested in accordance to IESNA LM-79

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-10	175.37	3.39%
10-20	495.07	9.58%
20-30	727.09	14.08%
30-40	838.38	16.23%
40-50	827.68	16.02%
50-60	718.62	13.91%
60-70	544.42	10.54%
70-80	343.63	6.65%
80-90	156.49	3.03%
90-100	75.26	1.46%
100-110	68.24	1.32%
110-120	58.62	1.13%
120-130	48.62	0.94%
130-140	38.01	0.74%
140-150	26.01	0.50%
150-160	15.03	0.29%
160-170	7.39	0.14%
170-180	1.73	0.03%

Polar Graph

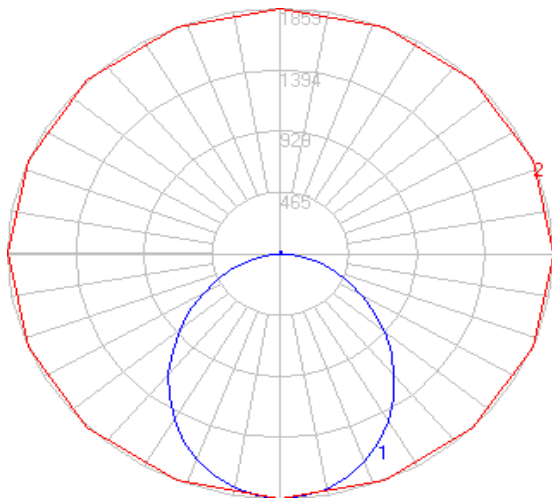


Physical Characteristics


Dimensions

Version	Depth	Length	Width	Weight
2FT- 7IN	2.9"	24.0"	7.0"	5lbs
2FT- 9IN	2.9"	24.0"	9.0"	6lbs
4FT- 7IN	2.9"	48.0"	7.0"	11lbs
4FT- 9IN	2.9"	48.0"	9.0"	12lbs


Top View

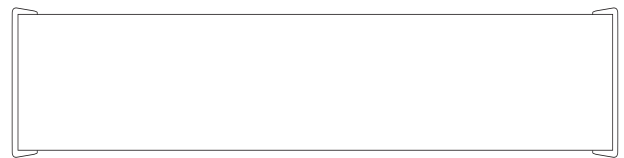

Bottom View

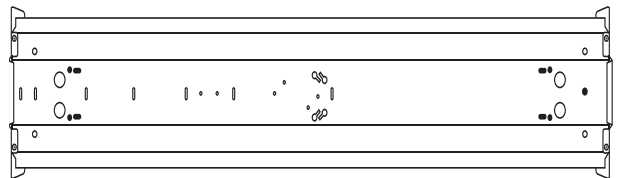

Side View



End View

