

Catalog No.	Type:
Job Name:	

5500 Series

Steel Sided Surface Mount




General Characteristics:

Lamp Type: 2, 4, 6 and 8 lamp T8 or T5
 Ballast Type: Electronic Ballast
 Standard Voltage: Universal 120-277
 Options: Dimming Ballast, Emergency Ballast, With Lamps
 Mounting: Ceiling Mount
 Additional Info.: UL Listed & Title 24 Compliant

Features & Specifications:

The 5500 series is a contemporary square edged, steel sided surface mount fixture. The innovative design of the 5500 series provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the home.

- High impact acrylic diffuser
- White diffuser creates soft uniform illumination
- Housing is made of 22 gauge steel
- Finished in baked white enamel
- Available in a variety of lamp configurations
- Available in 5 different sizes
- Hinged door frame provide easy access for cleaning and maintenance
- Suitable for damp location

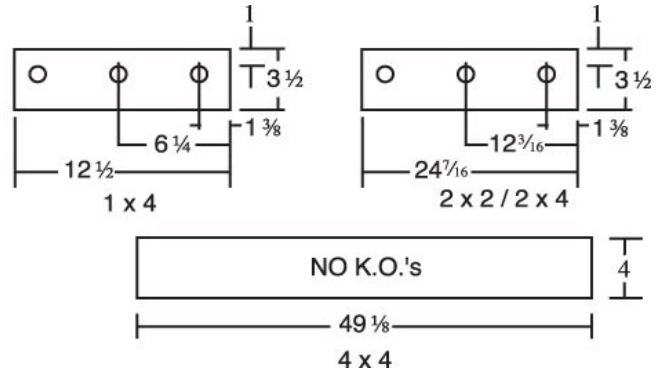

Catalog Ordering: Example: 5524-432/2-UNV

55				
-----------	--	--	--	--

FAMILY TYPE	SIZE- LAMPING	# OF BALLAST	BALLAST/ VOLTAGE	OPTIONS
55	12-217 (2- F17T8)	/1	UNV (120-277 Volt)	EMR (450 Lumen Emergency Ballast)
	12-214 (2- F14T5)	/2	DIM (Dimming Ballast)	EMR 1400 (1400 Lumen Emergency Ballast)
	12-224 (2- F24T5HO)	/3		WL (With Lamps)
	14-232 (2- F32T8)	/4		DWA (Drop White Acrylic Diffuser)
	14-228 (2- F28T5)			PA (Prismatic Acrylic)
	14-254 (2- F54T5HO)			P1 (1/2" Parabolic Louver)
	22-232 (2- F32T8U-6)			P2 (1 1/2" Parabolic Louver)
	22-414 (4- F14T5)			
	22-424 (4- F24T5HO)			
	24-432 (4- F32T8)			
	24-428 (4- F28T5)			
	24-454 (4- F54T5HO)			
	44-632 (6- F32T8)			
	45-832 (8- F32T8)			

Specifications and Dimensions Subject to change without notice

FSC Lighting 9120 Center Avenue, Rancho Cucamonga, CA 91730 Ph 909-948-8878 Fax 909-948-8510